



## Model: MTD350VAP

### Features:

- Fit most branded switch plates
- No neutral required, Soft start
- Suitable for 1-way operation only
- Additional button cover included
- Overheating protection
- Over current protection
- Full short circuit protection
- Minimum brightness adjustable
- Complies with Australian Standards AS/NZS60669.2.1



### IMPORTANT SAFETY ISSUES

- Make SURE the electricity is disconnected before any installation
- This product is NOT suitable for damp or explosive environments
- Modification of this product will void any warranty
- Indoor use only

### Technical specifications:

Dimming method: Trailing edge  
Supply voltage: 240V AC 50Hz  
Load wattage: 10-350W (1.4A max)  
Ta: -10...+40°C  
Weight: 25g

### Push Button Operation:

#### When the system is at OFF mode

- Short press: The dimmer will go immediately to the same brightness level as when it was last turned off.
- Double click: Go to maximum brightness
- Long press: The dimmer will increase the brightness level gradually from lowest to full brightness

#### When the system is at ON mode

- Short press: Turn the dimmer off.
- Double click: Go to maximum brightness
- Long press: Press and hold the button to dimming up and down. Release the button to stop

#### Set the minimum brightness

- At ON mode, short press 5x within 1.5 seconds to start;
- Adjust to required minimum brightness, then press 5x quickly to set the minimum brightness; If successful, the output will go to the maximum brightness.

#### Reset to factory defaults

- At ON mode, press 9x quickly to reset minimum output to defaults; If successful, the output will go to the minimum brightness.

#### Note:


minimum brightness output should not exceed 70% of maximum brightness output.

## Trailing Edge Push Button Dimmer

### INSTALLATION INSTRUCTIONS


#### Replacing Button Cap:

- Remove the button cap with screwdriver
- Install the new button cap onto mechanism

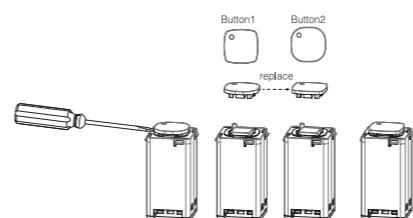

This product comes complete with a 12 Month Replacement Warranty please visit our Martec website for all Warranty information. [www.martecaustralia.com.au](http://www.martecaustralia.com.au)


**This product must be installed by a licensed electrician according to AS/NZS 3000**



#### Wiring Instructions:


- Disconnect power
- Remove switch plate from wall
- Connect the dimmer in accordance with the wiring diagram.
- For installations involving more than one control in wallbox, refer to the multi-gang de-rating before beginning.
- Refit switch plate to wall
- Reconnect power

#### Wiring Diagram:



#### MULTI-GANG RATING

Number of Dimmers	Max. Load per Dimmer
1	350W
2	250W
3	200W



[www.martecaustralia.com.au](http://www.martecaustralia.com.au) | 02 8778 7500 | [sales@martecltd.com.au](mailto:sales@martecltd.com.au)

