

Blade LED Batten Installation Guide

We strongly recommend that you read this manual carefully before installation.
Installation MUST be carried out by a qualified and licensed electrician.




Replacement
Warranty



Models Parameters:

MLBF60345W	Martec Blade LED Batten 18W LED 600mm Tricolour White
MLBF12345W	Martec Blade LED Batten 36W LED 1200mm Tricolour White

Installation Instructions

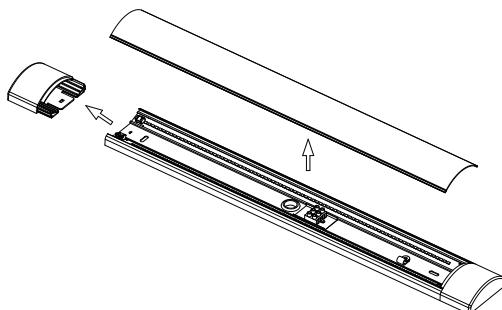


Step 1: Gently remove the side end cap .
(opposite end to the switch)
and diffuser from the main body.

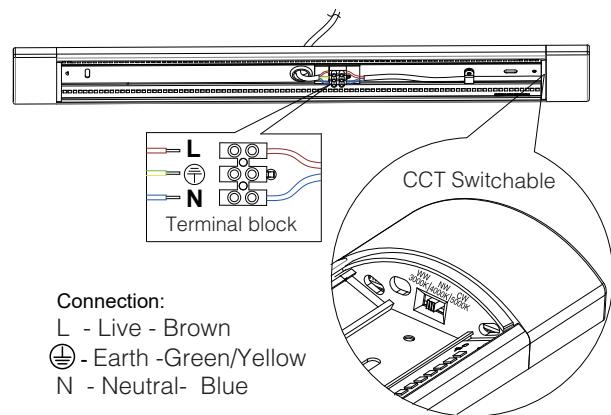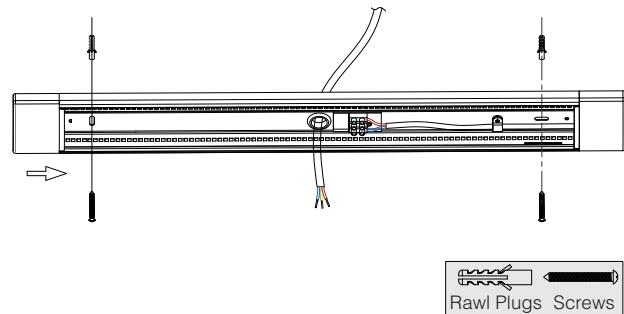

Step 3: Individually connect the Live wire, Neutral wire and Earth wire into the terminal block.
Select desired colour temperature via switch.

Step 2: 1. Refit end cap, use fitting as a template to drill mounting and cable entry holes.
2. Mount the fitting using screws provided (and Rawl plugs if necessary).

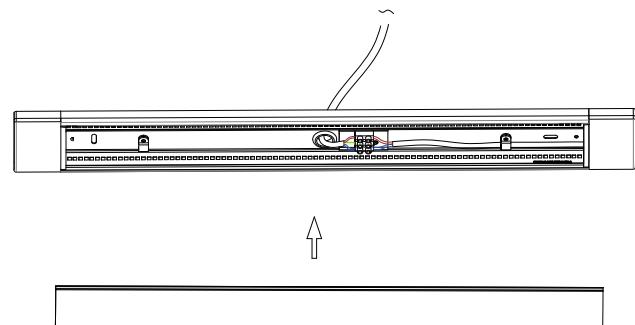

Step 4: Assemble LED diffuser back to base housing.

Specification

Rated Voltage: 220-240V 50Hz
Max Wattage: 18W for 600mm battens or 36W for 1200mm battens
Colour Temperature : CCT Tri-colour WW 3000K NW 4000K CW 5000K
Driver type: In-built (non isolated) SAA driver, Class 1 protection, non dimmable
Product size: L600*W75*H26mm or L1200*W75*H26mm

- This lamp must be installed by a qualified electrical contractor ONLY
- IP20 Indoor Installation only
- Warning: Before obtaining access to terminals, all supply circuits must be disconnected

2 Year Replacement Warranty

Visit our website for details <https://www.martec.com.au/warranty-statement/>