MARTEC Lighting

EMERGENCY EXIT LIGHT

3W LED EMERGENCY EXIT LIGHT RECESSED SLIM



2 Year Replacement Warranty | IP20 Ingress Protection | D24 Emergency Classification | 600mA Rechargable Battery | 50,000 HOURS LED Lifetime | Polycarbonate Housing


Model Number

TLEESR360

Features

- Recessed mounting option
- Large terminal block
- Overcharge and discharge protection
- All in one solution including all pictogram inserts
- Manual test switch and maintained operation

DIMENSIONS

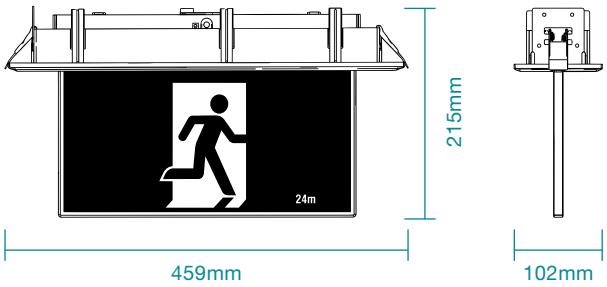

SPECIFICATIONS

Model Name	Emergency Exit Light
Model Number	TLEESR360
Power Wattage	3W
Voltage	220-240Va.c. 50-60Hz
Materials / Housing	Polycarbonate
Colour Temperature	6000K
IP Rating	IP20
Ambient Operating Temperature	0°C - 40°C
Battery	LifePo4 1 cell 3.2v 600mAh rechargeable pack
Charging Time	16 hours
Usage Duration	180 minutes

INSTALLATION

Installation	By licensed electrician only
Warranty	2 year replacement warranty

*For further information regarding warranty terms and conditions, please visit our website: https://www.martec.com.au/warranty-statement/

Warranty is void unless installed by a licensed electrician.

SPACING TABLE MOUNTING HEIGHT (M)

NATA Classification	**2.1**	**2.4**	**2.7**	**3.0****
C0 - D4	7.2	7.3	7.3	7.3
C90 - D4	6.5	6.6	6.6	6.5

**Maximum mounting height allowed is 2.7m. For exceptions, see AS2293.1 2018

AVAILABLE COLOURS



Model	Barcode
TLEESR360	9 312375 505679

SHIPPING

	Carton Size				
Model Number	**H**	**W**	**L**	**Carton Quantity**	**Carton Gross Weight**
TLEESR360	495mm	357mm	357mm	10	13.5kg

Aust/NZ Approval No. GMA-520254

MARTEC Lighting

EMERGENCY EXIT LIGHT

3W LED EMERGENCY EXIT LIGHT SURFACE MOUNT SLIM



2 Year Replacement Warranty | IP20 Ingress Protection | D24 Emergency Classification | 600mA Rechargable Battery | 50,000 HOURS LED Lifetime | Polycarbonate Housing


Model Number

TLEESC360

Features

- Universal mounting option
- Large terminal block
- Overcharge and discharge protection
- All in one solution including all pictogram inserts
- Manual test switch and maintained operation

DIMENSIONS

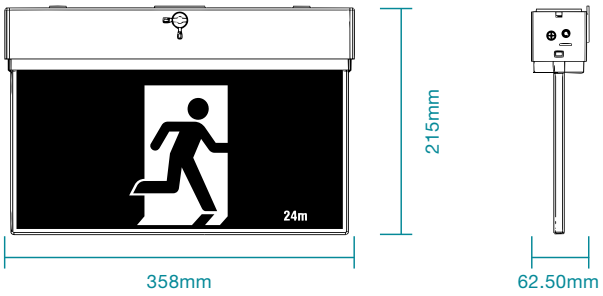

SPECIFICATIONS

Model Name	Emergency Exit Light
Model Number	TLEESC360
Power Wattage	3W
Voltage	220-240Va.c. 50-60Hz
Materials / Housing	Polycarbonate
Colour Temperature	6000K
IP Rating	IP20
Ambient Operating Temperature	0°C - 40°C
Battery	LifePo4 1 cell 3.2v 600mAh rechargeable pack
Charging Time	16 hours
Usage Duration	180 minutes

INSTALLATION

Installation	By licensed electrician only
Warranty	2 year replacement warranty

*For further information regarding warranty terms and conditions, please visit our website: https://www.martec.com.au/warranty-statement/

Warranty is void unless installed by a licensed electrician.

SPACING TABLE MOUNTING HEIGHT (M)

NATA Classification	**2.1**	**2.4**	**2.7**	**3.0****
C0 - D4	7.2	7.3	7.3	7.3
C90 - D4	6.5	6.6	6.6	6.5

**Maximum mounting height allowed is 2.7m. For exceptions, see AS2293.1 2018

AVAILABLE COLOURS



Model	Barcode
TLEESC360	9 312375 505631

SHIPPING

	Carton Size				
Model Number	**H**	**W**	**L**	**Carton Quantity**	**Carton Gross Weight**
TLEESC360	495mm	357mm	357mm	10	11.5kg

Aust/NZ Approval No. GMA-520254