MODEL:TLEESR360(Slimline)

INSTALLATION AND OPERATIONAL MANUAL

In Australia and New Zealand, only licensed electricians are permitted by law to work with electrical installations.
The Installer is responsible for ensuring compliance with all relevant building and safety codes and regulations i.e. AS3000 and AS2293.1.

DO NOT INSTALL OR CONNECT THIS PRODUCT UNLESS YOU ARE A LICENSED ELECTRICIAN.
ISOLATE THE ELECTRICAL SUPPLY BEFORE INSTALLING, DECOMMISSIONING OR REPLACING THIS FITTING.
DO NOT TOUCH THE TERMINALS WHEN THE LIGHT FITTING IS ENERGISED.
PLEASE DO NOT TAMPER OR MODIFY THIS FITTING. DOING SO WILL VOID WARRANTY.

APPLICATION :

This LED Exit is intended for connection to an unswitched active supply. When mains power is available, the LED lamp is lit and the green charge indicator LED is ON. Mains power provides continuous charge to the rechargeable batteries. When mains is disrupted, the LED lamps receive supply from the internal batteries and remains illuminated automatically.

SPECIFICATIONS:

Model	TLEESR360(Slimline)
Input Voltage	220-240VAC 50/60Hz
Light Source	3W LED Strip
Battery	$LiFePO_4$
Autonomy	> 120 minutes
Mounting	Recessed - Cut out 406mmx72mm
Temperature	0°C - 40°C
IP Rating	IP20
Mode	Maintained
Material	Flame Retardant Polycarbonate
Classification	C0:E4:C90:D2
Warranty	2 years replacement warranty

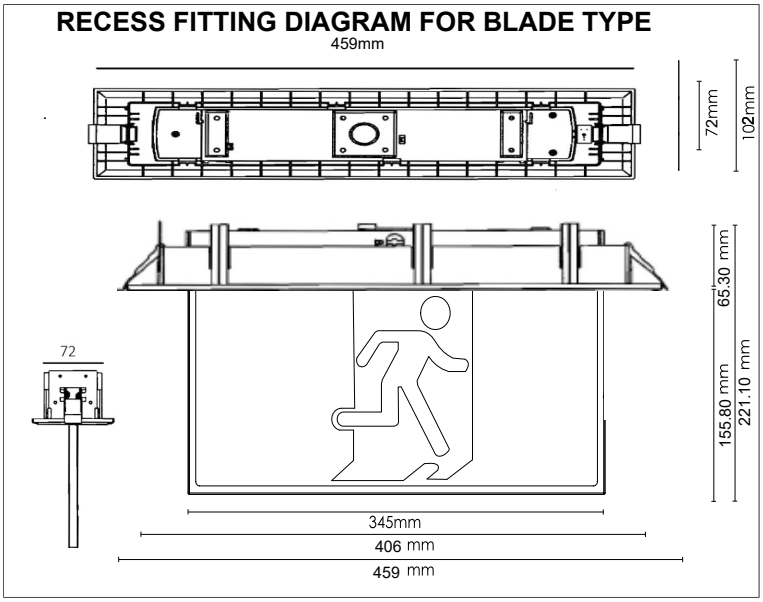


FIGURE 1

INSTALLATION:

1. Unpack the fitting and inspect for any visible damage. If damage is found, repack the goods and return it to your point of sale for replacement.
2. On passing the visual inspection, mark the position of the fitting at the desired ceiling location and provide a 406MMX72MM cutout.
3. Pass the supplied flex cable through the ceiling cutout and connect the plug to mains power.
4. Then, pull back the two spring clips and release once it gets through. Ensure that the fitting is secure and flush against the ceiling.
5. All fittings are supplied with pack of Running Man decals for single or double sided applications. **It is not necessary to remove the diffuser bracket to insert the desired Running Man decal.** Refer to Figure 3 for detailed instructions.
6. Once mains supply is present, the LEDs and green charge indicator LED will energise and remain lit. Allow a few minutes for the battery to receive a small charge, then press and hold the manual test switch button located on the side of the unit for a few seconds and observe the operation of the LEDs switching from mains to emergency mode.
7. Under normal operation conditions, the emergency function of the fitting will automatically operate when there is loss of supply to the normal lighting circuit.

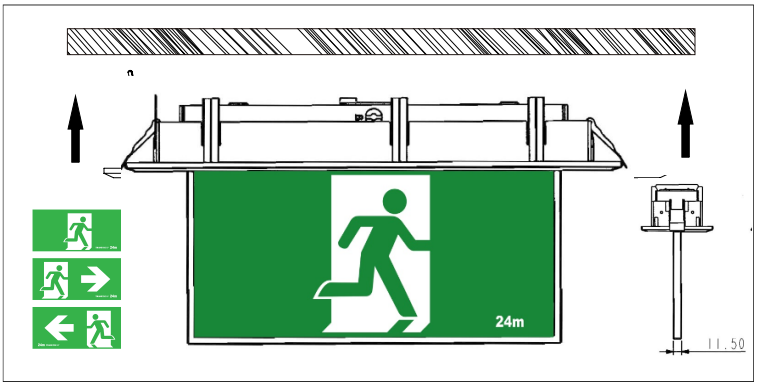


FIGURE 2

INSTALLING PICTOGRAMS

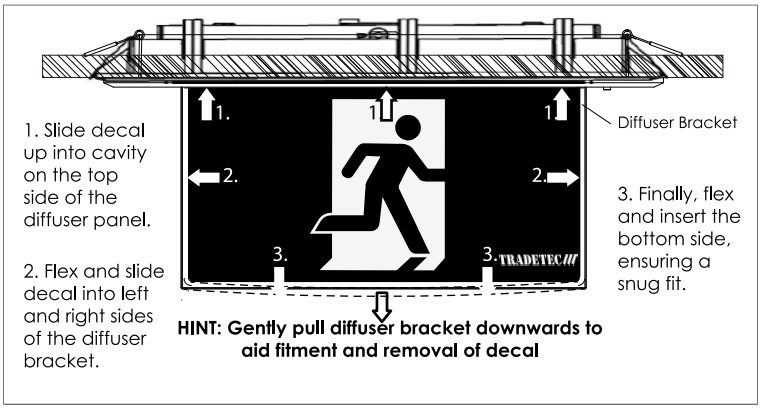


FIGURE 3

SETUP AND DISCHARGE:

IMPORTANT : The initial set up requirements for brand new installations requires the fitting to undergo a 120 minute discharge test following a continuous 16 hour charge period. A discharge test is performed by simulating mains failure on the emergency lighting circuit.

6 monthly: Following this, a 90 minute discharge test is required at least every 6 months thereafter. All installation, discharge and maintenance data must be recorded in a logbook.

12 monthy: Clean all light emitting, diffusion lenses and reflective surfaces

NOTE: Discharge tests should be undertaken at times of least risk (e.g. during daylight hours) wherever possible. This is because of the possibility and risk of a genuine failure of the normal lighting supply whilst the battery is discharged.

MAINTENANCE :

1. REPLACING THE BATTERY

Only replace the battery of the same chemistry and capacity as the original battery supplied. Failure in doing so will void all warranty and manufacturer liability as a result of user negligence.

2. BATTERY LIFE

The expected life of the battery in this product is 4 years with the expectation that the battery is constantly charged, receives a cyclic discharge at least every 6 months, and is operated within its intended environment and conditions (refer to product specification). Regularly discharging the batteries e.g. during construction stage, will significantly shorten the battery lifespan.
Product failure as a result of this practice is strictly that the battery will not be covered under replacement warranty.

MARTEC PTY LTD: 2 YEAR REPLACEMENT WARRANTY STATEMENT*

WARRANTY STATEMENT:

Martec Pty Ltd warrants this product for a period of 2 years “Replacement ” warranty from the original date of purchase for residential situations only :

IMPORTANT NOTICE: MARTEC PTY LTD WARRANTS THIS PRODUCT FOR 2 YEARS WITH A "2 YEAR REPLACEMENT WARRANTY. MARTEC PTY LTD ONLY WARRANTS THE MARTEC PRODUCT AGAINST FAULTY WORKMANSHIP AND SUBJECT TO THE CONDITIONS AND PROVISIONS SET OUT BELOW:

1. The 2 year “Replacement ” warranty applies only if the product was purchased in Australia and does not transfer from the original purchaser. All Martec Products replaced under "replacement"warranty are only warranted for the balance of the initial warranty replacement period.

2. Any changes to plated , ABS, Polycarbonate or painted finishes due to climate conditions or other circumstances deemed to be beyond the control of Martec Pty Ltd or their authorised agent are not covered under this warranty.

3. Any claim made in relation to this warranty is solely limited to the replacement of the product only , parts and labour of the authorised service agent approved by Martec Pty Ltd. No parts/products are to be disposed of prior warranty visit. No acceptance of other liability for incidental or consequential damage is covered. Martec Pty Ltd does not cover travelling costs incurred by service agents where service is requested by the purchaser outside of the Martec Pty Ltd service network. The Martec Pty Ltd service network is defined at our discretion yet is limited by the boundary of the city in which you live. Travel outside of the city limits by the Martec Pty Ltd authorised service agent will incur commercial costs to be paid for by the purchaser at a rate calculated by the number of kilometres travelled beyond the city limits. Any service required outside of the service network will be provided in the following manner Per warranty claim, a full replacement will be sent to the customer’s residence and a maximum of $80AUD plus GST plus freight will be covered by Martec Pty Ltd. All other costs over and above the $80AUD, including but not limited to, labour and travel costs are to be paid for by the purchaser. Please Note: it is the responsibility of the purchaser to call Martec customer service number (02 8778 7500) prior to any electrician leaving the job site if any problems occur. Any installing electrician costs and/or fees invoiced to the customer prior to the customer contacting Martec to lodge a warranty application will not be covered by Martec.

4. This warranty becomes void if the product was not installed as per the instruction manual by a qualified and licensed electrician. In addition, this warranty will be considered void if any, or all, of the following has occurred: tampering with the product, product damage, repair by non-qualified electrician, becoming faulty due to improper use, normal wear and tear, accident damage, product abuse, and/or failure to use the product in accordance with the instructions relating to the installation.

5. Repairs carried out by the Martec approved service agent due to incorrect installation will be charged to the purchaser at the time of service. This warranty is limited to the product being repaired/replaced only by an approved Martec Pty Ltd service agent and does not include costs where the original installation was not carried out per the instruction manual. The product warranty is limited to defects in workmanship only and does not apply to loss or damage caused by abnormal or excessive force of any kind from internal or external sources.

6. Martec Pty Ltd reserves the right to change or amend any or all parts of this warranty statement at any time and without notice.

7. The costs associated with the hire of extension ladders and scaffolding to service ceiling fans or lighting luminaires been installed on ceilings higher than 3 metres from the ground, will not be covered by this warranty. These costs will be borne by the customer not Martec Pty Ltd.

PURCHASER PLEASE NOTE:

NOTE: Martec Pty Ltd assumes that installation of said Martec Product is carried out as this instruction manual has aforementioned. It is the purchaser's responsibility to ensure that the installation of said Martec Product has been carried out by a certified electrician as per the guidelines of this instruction manual. As it is the purchasers responsibility to check the stability and proper installation of the Martec Product, the purchaser's electrician should check and identify any problems prior to finalising installation.
Martec Pty Ltd only covers manufacturing faults associated with said Martec Product per the above warranty provisions. The warranty will not cover the entry of foreign matter or influences to the product including, but not limited to: liquid, moisture, dirt, dust, electrical fluctuations, or any additional problems encountered if a Martec ceiling fan is used in an outdoor environment.
Power supply faults or influences resulting in damage to this product are not covered under this warranty.

The warranty does not cover any loss, damage or delay directly or indirectly caused by any malfunction of or defect of or failure of the product other than stated in this warranty.

IMPORTANT NOTICE:

ALL CLAIMS FOR WARRANTY MUST BE ACCOMPANIED WITH THE FOLLOWING THREE DOCUMENTS:

1. Copy of the Installation Receipt OR Tax Invoice OR Certificate Of Compliance for the installation of the Martec product from the installing electrician. If one of these installation documents cannot be provided, we will only accept a typed and signed letter on a business letterhead from the installing electrician stating he/she installed the Martec product at your address along with a scanned copy of the electricians licence. Please note that an email is not a sufficient installation document.
2. Copy of the Purchase Receipt/store Tax Invoice for the Tradetec product.
3. Copy of the completed warranty card, signed and dated. The warranty card is located after this warranty statement, or on the last page of your instruction manual. Please ensure that the purchaser's full name and contact details are clearly stated, in addition to the full nature of the fault and the product number.

Upon receipt of the abovementioned documentation, Martec Pty Ltd will issue a service call to fulfil the conditions of this warranty. It is the responsibility of the purchaser to keep the documents required for a warranty application for the duration of the "In Home" warranty period.

This warranty will become void and a service fee will be invoiced to the individual that lodged the warranty claim, if one or more of the following is found:

- The product is deemed to be a non Martec product.
- A manufacturing fault is not detected by the Service Agent.
- The product is deemed to be working as per the specifications of the product.
- The original installation of the product was not carried out by a licenced electrician OR installation of the product was not carried out in accordance with Martec instructions.

CUSTOMER SERVICE LOCAL NUMBER
(PHONE) 02 8778 7500

CUSTOMER SERVICE
(FAX) 02 8778 7555

CUSTOMER SERVICE OPERATES BETWEEN
8AM TO 5PM EST MONDAY THROUGH FRIDAY

IMPORTANT: PLEASE DO NOT PHONE THE RETAILER FOR WARRANTY WORK. INSTEAD PHONE THE CUSTOMER SERVICE NUMBER FOUND ABOVE.
MARTEC PTY LTD | 6 AUSTOOL PL, INGLEBURN NSW 2565 | PH: 02 8778 7500 | FAX: 02 8778 7555

Customer Details

Surname..... Given Name.....

Address.....

Daytime Ph..... A/h Ph.....

Email.....

Warranty Details

Date of Purchase..... Installation Date.....

Product Description.....

Store..... P.O. No.....

Fault Description.....

.....

.....

.....

I, the Customer, hereby acknowledge that I have read and agree with the Martec Pty Ltd warranty statement and the conditions found within regarding the warranty service and its limitations.

I, the Customer, acknowledge that Martec Pty Ltd reserves the right to charge me, labour and material cost of any replacement parts or products if required, in addition to the costs associated with shipping these parts to my location should the reported fault not be an actual manufacturing fault or malfunction. This will be assessed on a case by case basis by the authorised Martec Service Agent dispatched to my premises. The current minimum charge will be $190+GST.

I, the Customer, acknowledge that I will be liable for this charge should the authorised Martec Service Agent determine this to be the case. Failure to pay warranty recovery charges issued by Martec Pty Ltd will result in the termination of any remaining warranty, in addition to possible debt collection procedures.

I, ..., do hereby certify that I have read and comply with the aforementioned warranty conditions and agree to the conditions of this warranty claim.

Print Name:.....

Signature:.....

Date:.....